


## DETAIL & SUBMITTAL SHEET

WALLS & CEILINGS



FRONT ELEVATION

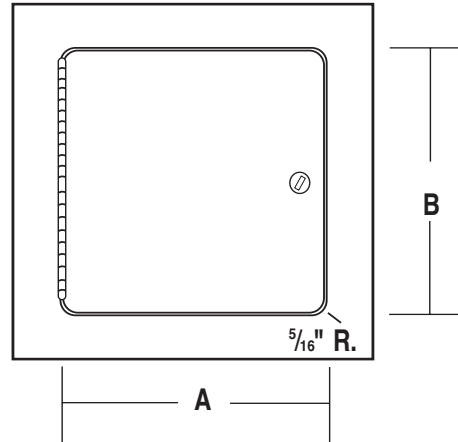

**SPECIFICATIONS:**

- Door: 16 ga. steel. Trim being 1-1/2" wide
- Frame: 16 ga. steel having a depth of 1-3/4"
- Hinge: Full length semi-concealed piano hinge
- Latches: Flush, stainless steel cam latch
- Finish: Grey baked enamel coat

**OPTIONS:**


**Finishes:**

- Stainless Steel Type 304
- Stainless Steel Type 316 No. 4 Satin Finish Brushed

**Options:**

- WB 151 Key Code Cylinder locks-keyed alike with 2 keys per lock
- Mortise Best Lock
- Weather resistive neoprene gasketing on 3 sides\*
- Special sizes available

SECTION DETAIL

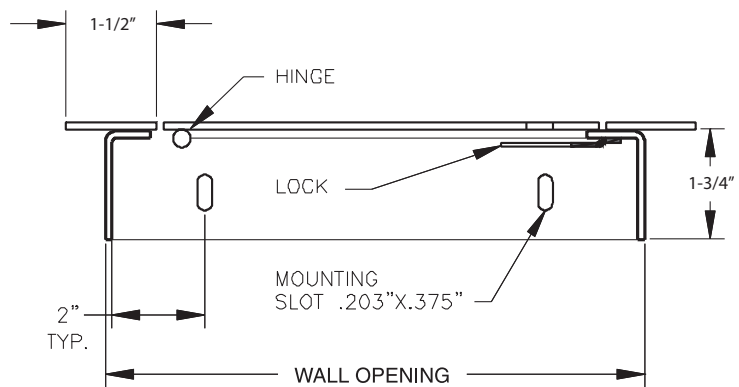

**Innovative cost effective access door. 16 ga. return frame and unwelded construction allows for an aesthetically pleasing appearance and square fit in all wall and ceiling applications. The frame is laser cut from one sheet of steel for visual aesthetics.**

✓	Item No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
	UAD 200	8 x 8	8 1/8 x 8 1/8	1	3
	UAD 200	10 x 10	10 1/8 x 10 1/8	1	4
	UAD 200	12 x 12	12 1/8 x 12 1/8	1	5
	UAD 200	14 x 14	14 1/8 x 14 1/8	3	6
	UAD 200	16 x 16	16 1/8 x 16 1/8	3	9
	UAD 200	18 x 18	18 1/8 x 18 1/8	3	10
	UAD 200	20 x 20	20 1/8 x 20 1/8	4	12
	UAD 200	22 x 22	22 1/8 x 22 1/8	4	13
	UAD 200	22 x 30	22 1/8 x 30 1/8	5	15
	UAD 200	22 x 36	22 1/8 x 36 1/8	5	16
	UAD 200	24 x 24	24 1/8 x 24 1/8	4	17
	UAD 200	24 x 30	24 1/8 x 30 1/8	5	22
	UAD 200	24 x 36	24 1/8 x 36 1/8	5	23
	UAD 200	30 x 30	30 1/8 x 30 1/8	6	24

\* Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.

Project: \_\_\_\_\_ Date: \_\_\_\_\_

Contractor: \_\_\_\_\_ Architect: \_\_\_\_\_

Sizes: \_\_\_\_\_ Quantity: \_\_\_\_\_ Approval Initials: \_\_\_\_\_



Corporate Office: 1330 Progress Drive • Front Royal, VA 22630  
Phone: 1-800-255-5515 • Fax: 1-800-822-5001

[www.wbdoors.com](http://www.wbdoors.com)